

# Differential pressure switch For very low setting ranges Model DW03UN

WIKA data sheet PV 35.50




## Applications

- Differential pressure monitoring and control of processes
- Safety-critical applications in general process instrumentation, especially in HVAC and power generation incl. nuclear power plants
- For gaseous and dry media

## Special features

- No power supply needed for switching of electrical loads
- Robust switch enclosure from stainless steel 316L, IP66, NEMA 4X
- Setting ranges from 0.3 ... 2.5 mbar to 0.7 ... 16 mbar with high working pressure and high static pressure up to 300 mbar
- Intrinsic safety Ex ia available
- 1 set point, SPDT, high switching power up to AC 250 V, 10 A

## Process Performance Series

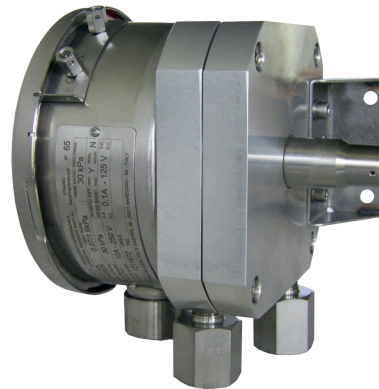

**Differential pressure switch, model DW03UN**

## Description

These high-quality differential pressure switches have been developed especially for safety-critical applications. The high quality of the products and manufacturing in accordance with ISO 9001 ensure reliable monitoring of your plant. In production, the switches are traced by quality assurance software at every step and subsequently are 100 % tested.

In order to ensure as flexible operation as possible, the differential pressure switches are fitted with micro switches, which enable the switching of an electrical load of up to AC 250 V, 10 A directly.

By using a diaphragm measuring system, the model DW03UN differential pressure switch is extremely robust and guarantees optimal operating characteristics and the highest measuring performances, with repeatability lower than 1 % of span.

The process connection with a centre distance of 54 mm lower mount allows an easy and comfortable mounting of a standard valve manifold.

## Standard version

### Measuring system

Single diaphragm

For clean gas or non-condensing vapour only

### Switch enclosure

Stainless steel 316L, tamper-proof. Laser-engraved product label from stainless steel.

### Ingress protection

IP66 per EN/IEC 60529, NEMA 4X

### Permissible temperature

Ambient  $T_{amb}$ : -10 ... +60 °C

Medium  $T_M$ : -10 ... +60 °C

### Switch contact

Micro switches with fixed dead band

1 x SPDT (single pole double throw)

Contact version	Electrical rating (resistive load)		Suitable for Ex ia option
	AC	DC	
UN 1 x SPDT, silver	250 V, 10 A	125 V, 0.1 A	Yes

### Set point adjustment

The set point can be specified by the customer or factory-set within the setting range. Subsequent adjustment of the set point on site is made using the adjustment screw, which is fastened to the switch and thus secured against loss.

### Repeatability of the set point

≤ 1 % of span

### Please specify:

Set point, switching direction for the contact, e.g.:

Set point: 5 mbar, falling

For optimal performance we suggest to adjust the set point between 25 ... 75 % of the span.

### Example

Setting range: 0.4 ... 10 mbar with one switch contact

Repeatability: 1 % of 9.6 mbar = 0.096 mbar

Dead band: (see table setting ranges)

2 x repeatability + dead band = 2 x 0.096 mbar + 0.3 mbar = 0.492 mbar.

Rising pressure: Adjust set point between 0.892 ... 10 mbar.

Falling pressure: Adjust set point between 0.4 ... 9.508 mbar.

### Process connection

Lower mount (LM)

- ¼ NPT female (standard)
- ½ NPT, G ½ A, G ¼ A male via adapter
- ½ NPT, G ¼ female via adapter
- M20 x 1.5 male via adapter

### Ignition protection type (option)

- Ex ia IIC T6/T4 <sup>1)</sup> Ga (gas)
- Ex ia IIIC T85/T135 <sup>1)</sup> Da (dust)

1) The temperature class is related to the ambient temperature range. See the type examination certificate for further details.

### Safety-related maximum values

(only for optional Ex ia versions)

Maximum values	
Voltage $U_i$	DC 30 V
Current $I_i$	100 mA
Power $P_i$	0.75 W
Internal capacitance $C_i$	0 µF
Internal inductance $L_i$	0 mH

### Wetted parts

Diaphragm: Glass-fibre reinforced NBR

Process connection: Aluminium casting alloy,  
Anticorodal® UNI 3571

Other parts: Stainless steel, epoxy resin coated

### Electrical connection

- ½ NPT female (standard)
- ¾ NPT, M20 x 1.5, G ½, G ¾ female
- Cable gland non-armoured, nickel-plated brass
- Cable gland non-armoured, stainless steel (AISI 304)
- Cable gland armoured, nickel-plated brass
- Cable gland armoured, stainless steel (AISI 304)
- MIL connector, 7-pin, DTL 5015

For cable connections to the internal terminal block use wire cross-sections between 0.5 ... 2.5 mm<sup>2</sup>.

For the grounding cable connection to the protective conductor use max. 4 mm<sup>2</sup> for the internal and external screw.

### Dielectric strength

Safety class I (IEC 61298-2: 2008)

### Mounting

- Mounting fixture from stainless steel (AISI 304)
- Option: Mounting bracket for 2" pipe mounting (AISI 304)

### Weight

- approx. 2.2 kg

## Setting range





Setting range in mbar	Working range in mbar	One-sided pressure in mbar	Static pressure in mbar	Fixed dead band for contact version UN
0.3 ... 2.5	0 ... 2.5	≤ 6	≤ 300	≤ 0.2
0.4 ... 4	0 ... 4	≤ 10		≤ 0.3
0.4 ... 6	0 ... 6	≤ 25		≤ 0.3
0.4 ... 10	0 ... 10	≤ 25		≤ 0.3
0.7 ... 16	0 ... 16	≤ 40		≤ 0.5

For clean gas or non-condensing vapour only

## Assembly

- Shut-off valve model 910.11, see data sheet AC 09.02
- Barstock valve model 910.81, see data sheet AC 09.18
- Diaphragm seals, see website
- Differential pressure gauge

## Approvals

Logo	Description	Country
	<b>EU declaration of conformity</b> <ul style="list-style-type: none"> <li>■ Low voltage directive, EN 60730-1</li> <li>■ ATEX <sup>1)</sup> directive (option); annex III, IV I M 1 II 1 GD</li> </ul>	European Community
	<b>IECEx</b> <sup>1)</sup> per IEC 60079-0, IEC 60079-11, IEC 60079-26 (option) Ex ia IIC T6/T4 <sup>2)</sup> Ga Ex ia IIIC T85/T135 <sup>2)</sup> Da	IECEx member states
	<b>EAC (option)</b> Hazardous areas (option)	Eurasian Economic Community
	<b>KOSHA (option)</b> Hazardous areas	South Korea


1) Double marking ATEX and IECEx on the same product label.  
2) The temperature class is related to the ambient temperature range.

## Certificates (option)

- 2.2 test report per EN 10204
- 3.1 inspection certificate per EN 10204

Approvals and certificates, see website

## Dimensions in mm

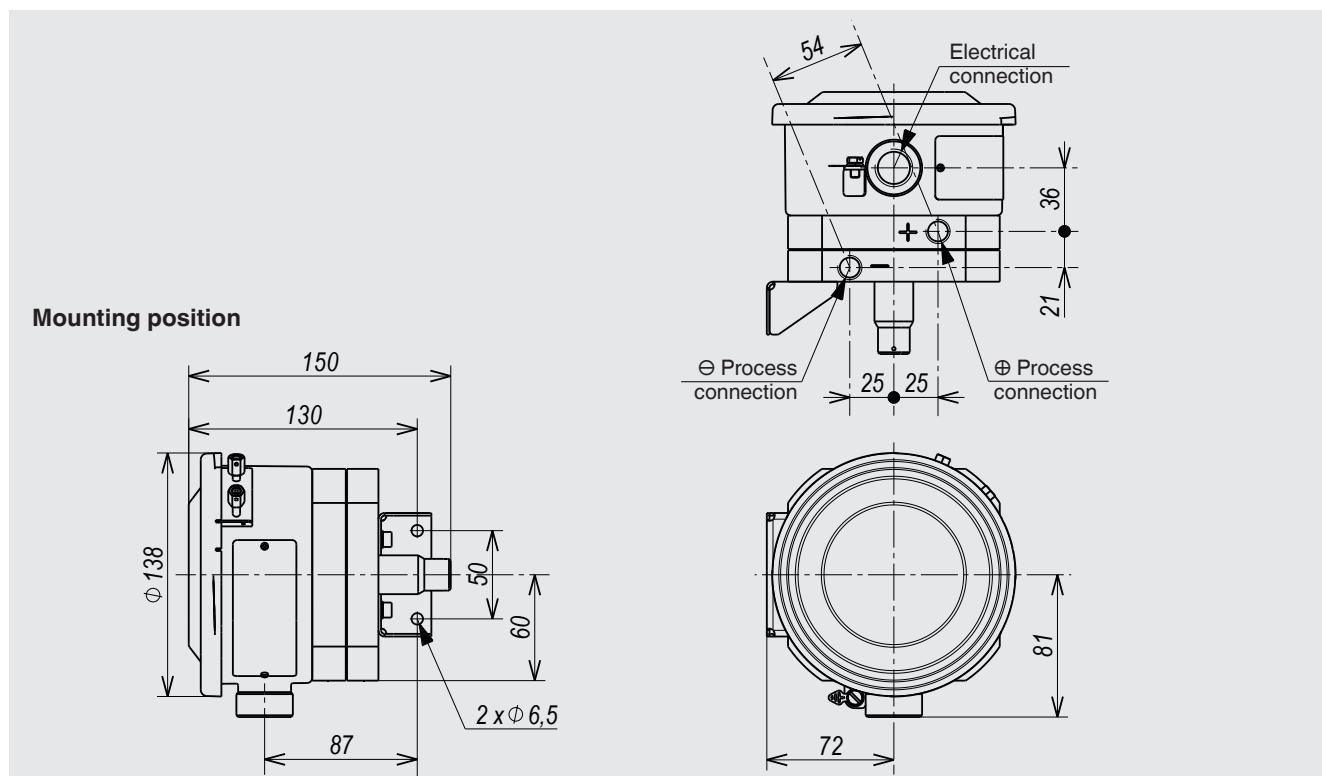

## Ordering information

Model / Static - One-sided pressure / Setting range / Process connection / Electrical connection / Options

© 07/2016 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.



**WIKAI Alexander Wiegand SE & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. +49 9372 132-0  
Fax +49 9372 132-406  
info@wika.de  
www.wika.de